

Technical Specifications

Power supply	6 ... 30VDC
Power consumption	typ. 49mW, max. 95mW
Power loss	max. 95mW
Interfaces	Loxone Tree: connection with Miniserver / Tree Extension
Ambient temperature	-20 ... 70°C / -4 ... 158°F
Humidity	max. 95% r.H. (non condensing)
Touch points	5 touch points, capacitive touch detection
Click feedback	Yes
Temperature detection range	-40 ... 125°C / -40 ... 257°F +/- 0.5°C / 0.9°F
Humidity detection range	0 ... 100% r.H. +/- 2% (non condensing)
Orientation light	Yes
Safety rating	IP40
Dimensions	80x80x10mm / 3.15x3.15x0.4" (LxWxH)
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

LOXONE

LOXONE

Need Help?

loxone.com/support



Touch Pure Tree

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com

V010620



Part No: 100493 (Vienna Edition)

About the product

The Loxone Touch Pure has five touch zones, which can be configured according to your needs. The large central touch zone is ideal for controlling lighting, whilst the corner zones are handy for controlling music and blinds, for example.

Features



- 5 touch buttons
- Temperature & Humidity sensor
- Optional click feedback
- Orientation LED light

Installation

Install the mounting frame on the desired installation place. Power up the device and pair it with your Miniserver in Loxone Config. To finish the installation attach the Loxone Touch on the mounting frame.

Connection

Wire cross-section	0.25 ... 0.8mm ² / AWG18 ... 23
Stripping length	5mm / 0.2"
Temperature resistance	-40 ... 105°C / -40 ... 221°F

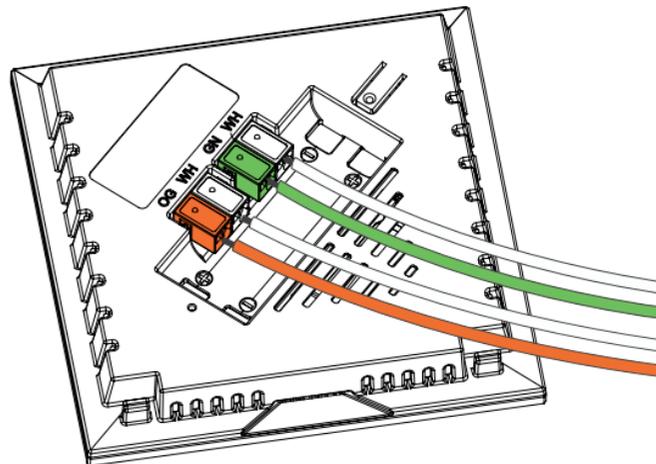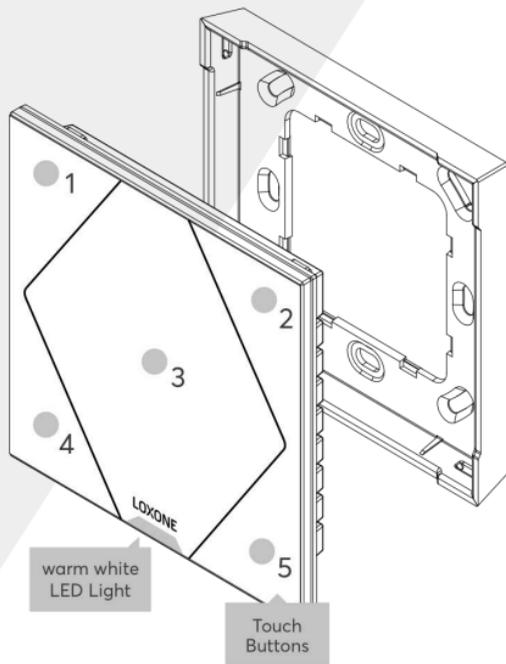

This folder is a part of the product!



For additional information, declaration of conformity, visit www.loxone.com/help/touch-pure-tree