

PoE Injector

Part No. 100486



Features

- PoE Injector/Power Supply, fully compliant with **IEEE802.3af, Mode A**
- DOE Level VI Compliant
- Non-Vented Case
- Field Interchangeable AC Clips
- Limited Power Source (LPS)
- 1G and 2.5G Data Speed Options
- Low Cost
- Full Protection OCP, OVP
- Diagnostic LEDs
- Australian GEMS Registered

Applications

- IP Telephones
- Wireless Network Access Points
- Blue Tooth Access Points
- Security Cameras
- IP Print Servers

Safety Approvals – varies per model

- cUL/UL 62368-1
- AS/NZS 62368.1
- IEC 62368-1

Mechanical Characteristics

- Length: 80mm (3.15in)
- Width: 45mm (1.77in)
- Height: 33mm (1.30in)
- Weight: 114g (4.0oz.)

Output Specifications

Model	DC Output Voltage	Load		Output Power	Data Speed	Regulation	
		Min.	Max.			Line	Load
POE16R-1AFG6-R ¹	56V	10mA	0.275A	15.4W	1G	+1V/-2V	
POE16R-1AFG6-2-R	56V	10mA	0.275A	15.4W	2.5G	+1V/-2V	

Notes:

1. Special order item. Minimum order quantity applies.

POE16R-1AFGyyyy-R Characteristics¹

INPUT:

AC Input Voltage Range

90 to 264VAC

AC Input Voltage Rating

100 to 240VAC

AC Input Current

0.55A (RMS) max for 90VAC

0.35A (RMS) max for 240VAC

Leakage Current

0.5mA max @ 254VAC/50Hz

AC Input Frequency

47-63Hz

AC Inrush Current

30A (RMS) max for 115VAC

60A (RMS) max for 230VAC

OUTPUT:

Total Output Power

15.4W

Ripple and Regulation²

200mV max, 115VAC/60Hz and

230VAC/50Hz

Efficiency³

DOE Level VI

Australian GEMS

Transient O/P Voltage

Protection 60V max at switch on/
off, any AC line phase

ENVIRONMENTAL: Temperature

Operation -20 to +45°C

Non-operation -20 to +75°C

Humidity 5 to 90%

EMC

Complies with FCC Part 15 Class B

Complies with EN55032 Class B

Complies with AS/NZS CISPR 32 Class B

Immunity

Harmonic: EN61000-3-2 Class A

ESD: EN61000-4-2. Contact
6KV Air 8KV. Criteria B

RS: EN61000-4-3. 3V/M

EFT: EN61000-4-4. 1KV input
0.5KV output

Surge: EN61000-4-5. L-N 1KV
L-G 2KV

CS: EN61000-4-6. 3V

Voltage Dips EN61000-4-11 Class 3

Dielectric withstand (HI-POT)

4242VDC for 1 sec, 10mA, 4 sec ramp
time

Insulation Resistance

Primary to Secondary: >10M OHM
500VDC

FEATURES:

Over Current Protection

≤450mA

Over Voltage Protection

< 120VDC – Latching.

Short Circuit Protection

300-450mA for 50-75ms

Hold-up Time

16mS min. 120VAC/60Hz and max load

Data in/Output Connector

RJ45

Output Connection

+pin 3,6 / -pins 1,2 (Mode A)

Notes:

1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
2. Measured with by-pass capacitors 0.1uF/10uF at output connector terminal and oscilloscope set at 20Mhz (tested by oscilloscope). 20 minutes warm-up required when operating at negative temperature.
3. Efficiency is measured after 30 minutes burn-in

POE16R-1AFGyyyy-R Characteristics

LED Indicators

Bicolor LED GREEN/YELLOW

Blinking GREEN – Unit is "ON" Active with No Load

Solid GREEN – Unit has detected a Valid IEEE802.3af Load

Blinking YELLOW/GREEN – Unit has detected an Invalid Load

Blinking YELLOW – Unit is in Over Load/Short Condition

AC Input Clips

RPA– AB01B-H: US


RPE– AB01B-H: Europe

RPK– AB01B-H: UK

AC Input Clips



Dimensional Diagram Unit: mm

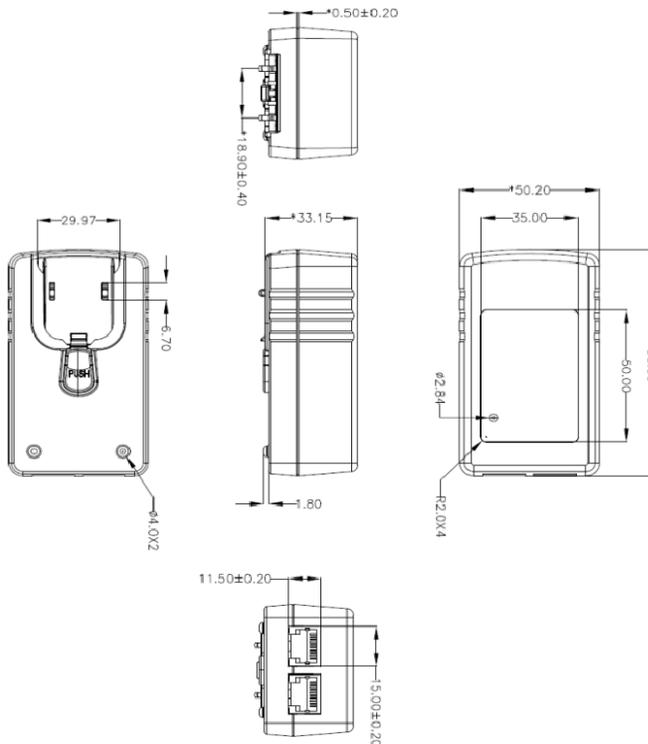

NOTE: This model has/The models in this product series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.