

## Supply & Power

Supply Voltage	18...26VDC
Power Consumption	0.05W (Standby) 35W (Peak)

## Interfaces

Master-Client Interface (MCI)	up to 20 speaker clients per Master up to 30m wire length between clients up to 600m total length Wiring: Twisted pair, Line topology
-------------------------------	--

## Ambient Conditions

Temperature	-10...50°C / 14...122°F
Humidity	max. 95% r.H. (non condensing)
Ingress Protection	 IP53 IP54

## Connecting Terminals

	24VDC	MCI
Wire cross-section	1...2.5mm <sup>2</sup> AWG17...12	0.28...0.8mm <sup>2</sup> AWG23...18
Stripping length	10mm / 0.39"	5...6mm / 0.2...0.24"
Temperature resistance	-40...70°C -40...158°F	-40...105°C -40...221°F

## Audio Specifications

Speaker Type	2-Way active speaker
Class-D Amplifier	35W nominal power 70W peak power
Frequency Range	35 ... 23000Hz
Crossover Frequency	1600Hz
SPL	108dB @1m max.
Woofer Ø	254mm / 10"
Tweeter Ø	32mm / 1.25"

## Dimensions

Total Ø x D	289 x 111mm / 11.38 x 4.37"
Hole cut out size Ø	258mm / 10.2"
Installation depth	108mm / 4.25"
Max panel thickness	36mm / 1.41"
Weight	2.85kg



For more information  
about this product, visit  
[loxone.com/help/IS10C](http://loxone.com/help/IS10C)

V310524

**Loxone  
Electronics GmbH**  
Smart Home 1  
4154 Kollerschlag  
Austria

**Loxone UK**  
The Forum  
Station Road  
Theale, RG7 4RA  
United Kingdom



For additional information,  
declaration of conformity, visit  
[www.loxone.com/datasheets](http://www.loxone.com/datasheets)

Need Help?  
[loxone.com/support](http://loxone.com/support)



# Install Speaker 10 Client

Part No.: 610153

LOXONE

## About the product

The Install Speaker 10 Client impresses with its outstanding audio qualities and its numerous possible use cases. It receives its audio signal from a Master Speaker, and is able to transmit the audio signal to further Client Speakers. In this way, it forms a flexible audio solution scalable to any building size.

### Features:


- Full integration into the Loxone System
- countless features like text-to-speech, doorbell, alarms, or audio notifications
- Music Streaming via Bluetooth (requires a Master Speaker)

### When planning the power supplies, we recommend considering:

- Background music, occasional party, low simultaneity factor, e.g. in a single-family house, office, hotel,...: 10W per speaker
- High simultaneity factor with loud music, e.g. bar, restaurant with bar service,...: 20W per speaker

## Safety Instructions

 Installation must be carried out by a qualified electrician in accordance with the applicable regulations. The device has to be fitted in accordance with building regulations for electrical and fire safety. The device is free of maintenance and must only be cleaned with a dry cloth. The device must not be used as part of safety-critical systems. Install the speaker in a way that the electronics on the back are protected from contact, damage, dirt and moisture.

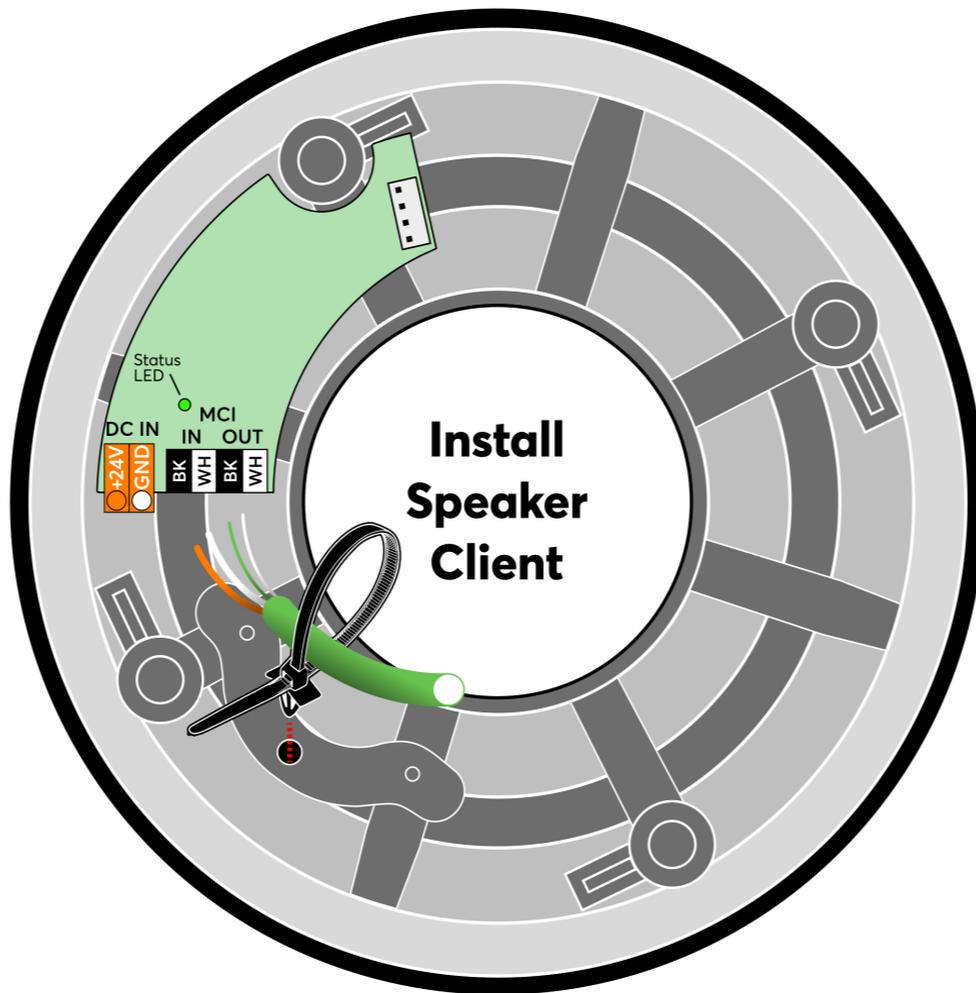

## Audioserver, MS Compact

