

Interfaces

LOXONE Air	868 MHz (SRD Band Europe), 4 channels, max. 15.1 mW e.r.p. 915 MHz (ISM Band Region 2), 10 channels, max. 13.2 mW internal antenna
Wi-Fi	connection to local Network Wi-Fi 2.4 GHz: 802.11 b/g/n/ax 2 400 ... 2 483.5 MHz (max. 100 mW EIRP) Wi-Fi 5 GHz: 802.11 n/ac/ax 5 150 ... 5 350 MHz (max. 200 mW EIRP) 5 470 ... 5 725 MHz (max. 200 mW EIRP)

This device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range in: AT, BE, BG, CY, CZ, DE, DK, EE, EL, ES, FI, FR, HR, HU, IE, IT, LT, LU, LV, MT, NL, PL, PT, RO, SE, SI, SK, IS, LI, NO, CH. The device is also restricted to indoor use in the United Kingdom.

Measurement Range

Temperature	10 ... 30 °C ± 0.5 °C / 50 ... 86 °F ± 0.9 °F
Humidity	20 ... 80 % RH ± 2.5 % (non-condensing)

Ambient Conditions

Temperature	-10 ... 45 °C / 14 ... 113 °F
Humidity	max. 95 % RH (non-condensing)
Ingress Protection	IP20



For more information
about this product, visit
loxone.com/help/touch-pure-display-air

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

Loxone US
3060 Plaza Drive
Suite 105
Garnet Valley, PA 19060
United States

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom



For additional information,
declaration of conformity, visit
www.loxone.com/datasheets

Need Help?
loxone.com/support

V010726



Touch Pure Display Air

Part No.: 100888

LOXONE

About the product

LOXONE Touch Pure Display brings flexible, intuitive room control together in a single, elegant device. A human-centered touch interface adapts to your room and lets you control lighting, shading, audio and more with ease.

When not in use, it enters Rest Mode, allowing you to turn the display off completely or show essential room information such as temperature at a glance.

Features

- Touch-based control for lighting, shading, audio & more
- Integrated temperature and humidity sensors
- Designed for low-power, presence-based operation
- Customizable background colors to blend seamlessly into the wall
- Easy installation with LOXONE Air and Wi-Fi

For best performance and use of further functions it is necessary to connect to Wi-Fi.



Electrical Specifications

Supply Voltage	18 ... 27 V DC
Power Consumption	Eco Mode: 0.7 W Maximum: 3 W
Power Supply Requirements	ES1/PS2 acc. IEC/EN/UL 62368-1 or SELV/LPS acc. IEC/EN/UL 60950-1

Operating Elements

Touch Area	capacitive touch detection
Backlight	Yes, dimmable
Ambient Light Sensor	Yes

Dimensions & Assembly

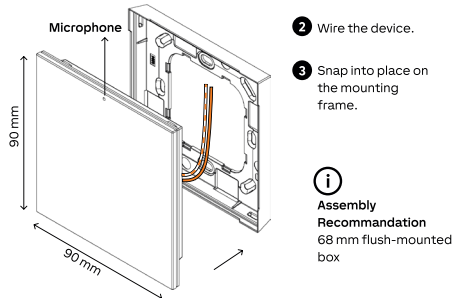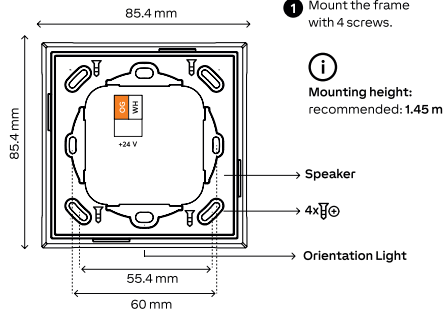

24 V DC Terminals

Wire cross-section	0.28 ... 0.8 mm ² / AWG 23 ... 18
Stripping length	5 ... 6 mm / 0.2 ... 0.24"
Temperature resistance	-40 ... 105 °C / -40 ... 221 °F

Information

Contains FCC ID: 2ARRV-000400 and 2ARRV-000375

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Loxone could void the user's authority to operate the equipment.

Declaration of conformity

Hereby, Loxone Electronics GmbH declares that the device Touch Pure Display Air is in compliance with Directive 2014/53/EU and 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address: www.loxone.com/ce100888

Safety Instructions

Installation must be carried out by a qualified electrician in accordance with the applicable regulations.
This device is free of maintenance and must only be cleaned with a dry cloth.