

## Technical Specifications

<b>Power supply</b>	via Nano IO Air / Dimmer Air
<b>Ambient temperature</b>	-20 ... 70°C / -4 ... 158°F
<b>Humidity</b>	max. 95% r.H. (non condensing)
<b>Touch points</b>	5 touch points, capacitive touch detection
<b>Click feedback</b>	Yes
<b>Safety rating</b>	IP40
<b>Dimensions</b>	90x90x23mm / 3.54x3.54x0.9" (LxWxH)
<b>Maintenance &amp; Cleaning</b>	This device is free of maintenance and may only be cleaned with a dry cloth.

# LOXONE

## Need Help?

[loxone.com/support](https://loxone.com/support)

**Loxone Electronics GmbH**  
Smart Home 1  
4154 Kollerschlag  
Austria

[loxone.com](https://loxone.com)



V260320

# LOXONE



## Touch Pure for Nano

Part No: 100207 (White)  
Part No: 100209 (Anthracite)

## About the product



The Loxone Touch Pure has five touch zones, which can be configured according to your needs. The large central touch zone is ideal for controlling lighting, whilst the corner zones are handy for controlling music and blinds, for example.

## Features

- 5 touch buttons
- Optional click feedback
- Orientation LED light

## Installation

Install the mounting frame on the desired installation place. Attach the Touch on the Nano IO Air or Nano Dimmer Air and configure it in Loxone Config.

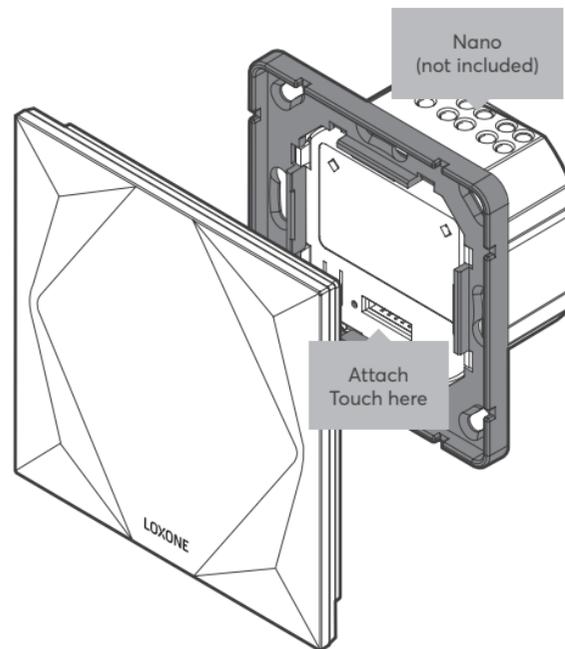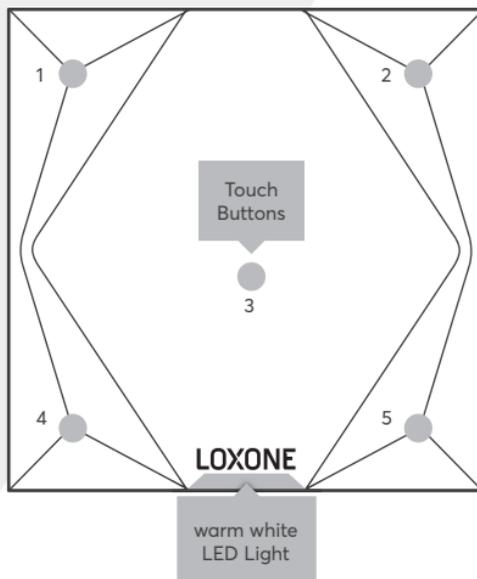

This folder is a part of the product!



For additional information, declaration of conformity, visit [www.loxone.com/help/touch-pure-nano](http://www.loxone.com/help/touch-pure-nano)