





■ Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- * Type HL LED Driver for use in Class I, Division 2 hazardous location luminaires
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)

















HLG-240H-12 A Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal
- D (option, safety pending): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


MODEL		HLG-240H-12	HLG-240H-15	HLG-240H-20	HLG-240H-24	HLG-240H-30	HLG-240H-36	HLG-240H-42	HLG-240H-48	HLG-240H-54[
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V				
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	16A	15A	12A	10A	8A	6.7A	5.72A	5A	4.45A				
	RATED POWER	192W	225W	240W	240W	240W	241.2W	240.24W	240W	240.3W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p				
	VOLTAGE ADJ. RANGE Note.6	11.2 ~ 12.8V	14 ~ 16V	18.6 ~ 21.4V	22.4 ~ 25.6V	28 ~ 32V	33.5 ~ 38.5V	39 ~ 45V	44.8 ~ 51.2V	50 ~ 57V				
DUTPUT		Can be adjusted by internal potentiometer A type and C type only												
	CURRENT ADJ. RANGE	8 ~ 16A	7.5 ~ 15A	6 ~ 12A	5 ~ 10A	4 ~ 8A	3.3 ~ 6.7A	2.86 ~ 5.72A	2.5 ~ 5A	2.23 ~ 4.4				
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION Note.8	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	SETUP, RISE TIME Note.9	1000ms,80n	ns/115VAC	500ms,80m	s/230VAC at	full load		'	'	•				
	HOLD UP TIME (Typ.)	15ms at full lo	ad 230VAC	115VAC										
	VOLTAGE RANGE Note.5	90 ~ 305VAC	127 ~ 431	IVDC										
	FREQUENCY RANGE	47 ~ 63Hz												
	POWER FACTOR (Typ.)	PF>0.98/115\	PF>0.98/115VAC, PF>0.95/230VAC at full load (Please refer to "Power Factor Characteristic" curve)											
	TOTAL HARMONIC DISTORTION	THD< 20% v	THD< 20% when output loading ≥ 50% at 115VAC/230VAC											
INPUT	EFFICIENCY (Typ.)	90%	90%	91.5%	92.5%	92.5%	92.5%	92.5%	93%	93.5%				
	AC CURRENT (Typ.)	4A / 115VAC 2A / 230VAC 1.2A / 277VAC												
	INRUSH CURRENT (Typ.)	COLD START 75A(twidth=570µs measured at 50% Ipeak) at 230VAC												
	LEAKAGE CURRENT	<0.75mA / 277VAC												
	OVER CURRENT Note.4	95~108%												
		Protection type: Constant current limiting, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed												
ROTECTION		13.5 ~ 18V	17.5 ~ 21.5V	23.5 ~ 27.5V	27 ~ 34V	33 ~ 39V	43 ~ 49V	48 ~ 54V	55 ~ 63V	60 ~ 67V				
	OVER VOLTAGE	Protection type: Shut down and latch off o/p voltage, re-power on to recover												
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down												
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,	10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)												
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes												
		UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750, CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13 independent												
	SAFETY STANDARDS Note.7	(except for HLG-240H C type), UL60950-1, UL8750, TUV EN60950-1, IP65 or IP67 approved, J61347-1, J61347-2-13												
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75	KVAC I/P-F	G:2KVAC O	P-FG:1.5KVA	С	·							
ЕМС	ISOLATION RESISTANCE	I/P-O/P. I/P-F	G. O/P-FG:10	00M Ohms / 50	0VDC / 25°C/	70% RH								
	EMC EMISSION						Class C (≧50% I	load) : EN6100	0-3-3					
	EMC IMMUNITY			,	,		ustry level (sur							
	MTBF	207.9Khrs mi		K-217F (25°C)		, 5	, , ,,,,,,,	,,,						
OTHERS	DIMENSION			HLG-240H-Bla		51*68*38.8mm	ı (L*W*H)(HLG	-240H-C)						
-	PACKING		. ,,	JFT(HLG-240-			cs/15.8Kg/1.16		0-C)					
NOTE	All parameters NOT special Ripple & noise are measure Tolerance : includes set up	ly mentioned a ed at 20MHz o tolerance, line	re measured a	at 230VAC inp using a 12" to load regulation	ut, rated load wisted pair-wire on.	e terminated w	rith a 0.1uf & 4	7uf parallel cap						

- 4. Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.

 5. Derating may be needed under low input voltages. Please check the static characteristics for more details.


- 6. A type and C type only.
 7. Safety and EMC design refer to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18.
- 8. Length of set up time is measured at cold first start. Turning ONOFF the power supply may lead to increase of the set up time.
- 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 10. Refer to warranty statement.
- 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.



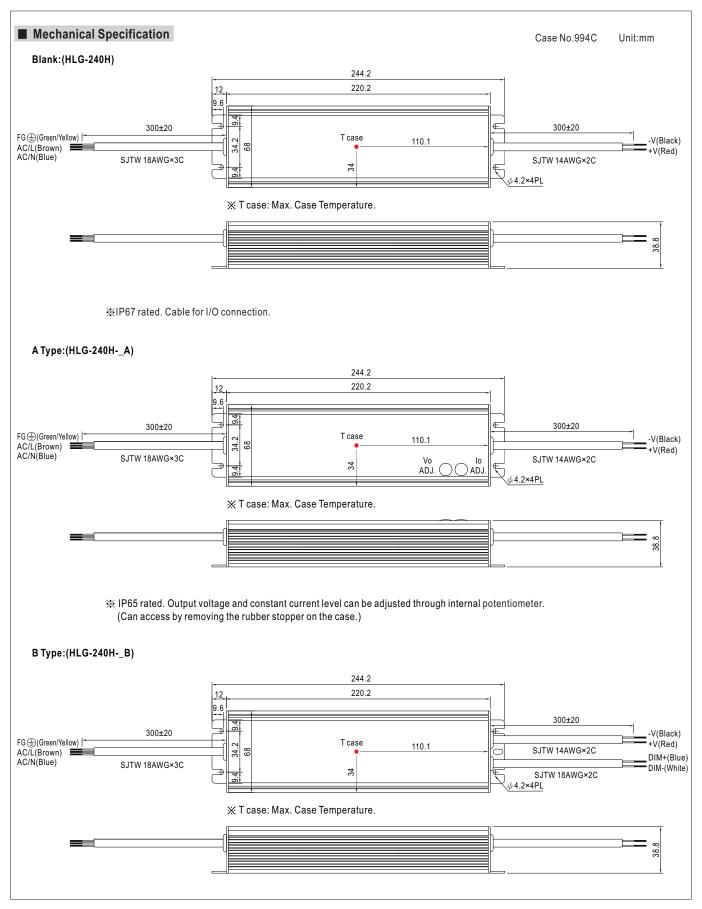





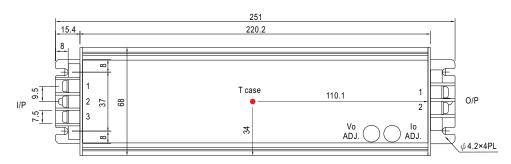

 \frak{X} T case: Max. Case Temperature.



※ Output voltage and constant current level can be adjusted through internal potentiometer. (Can access by removing the rubber stopper on the case.)


AC Input Terminal Pin No. Assignment

Pin No.	Assignment
1	FG ±
2	AC/L
3	AC/N

DC Output Terminal Pin No. Assignment


Pin No.	Assignment
1	-V
2	+V

■ Block Diagram

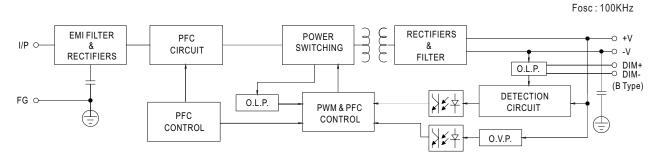


■ Derating Curve

■ Static Characteristics

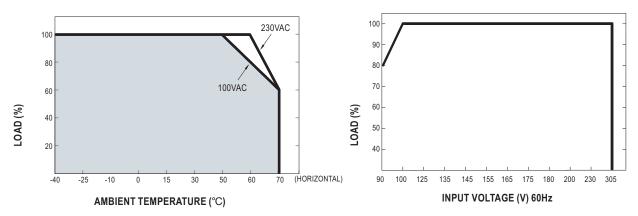




■ Power Factor Characteristic

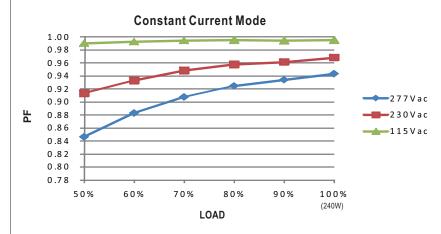

■ EFFICIENCY vs LOAD (48V Model)

HLG-240H series possess superior working efficiency that up to 93.5% can be reached in field applications.

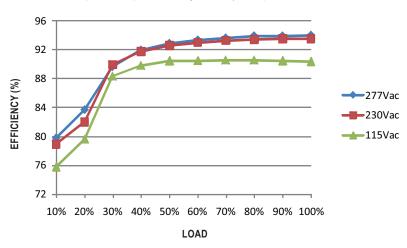


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION(for B-type only)



- ※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or
 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

	Resistance value	Single driver	10ΚΩ	20ΚΩ	30ΚΩ	40ΚΩ	50ΚΩ	60ΚΩ	70ΚΩ	80ΚΩ	90ΚΩ	100ΚΩ	OPEN
		Multiple drivers	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	
ľ	Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

* 10V PWM signal for output current adjustment (Typical): Frequency range:100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Wusing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- *Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture $\mbox{ON/OFF}$:

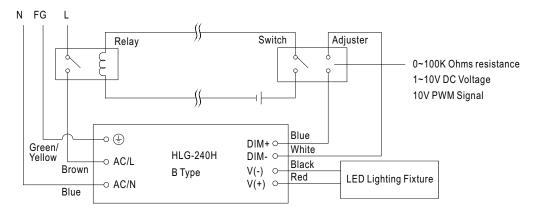

Using a switch and relay can turn $\ensuremath{\mathsf{ON}}\xspace/\ensuremath{\mathsf{OFF}}$ the lighting fixture.


- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



■ WATERPROOF CONNECTION


Waterproof connector

 $Waterproof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-240H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$




Size	Pin Configuration (Female					
M12	000	000				
IVITZ	4-PIN	5-PIN				
	5A/PIN	5A/PIN				
Order No.	M12-04	M12-05				
Suitable Current	10A max.	10A max.				

Size	Pin Configuration (Female)			
M15	00			
IVITO	2-PIN			
	12A/PIN			
Order No.	M15-02			
Suitable Current	12A max.			



O Cable Joiner

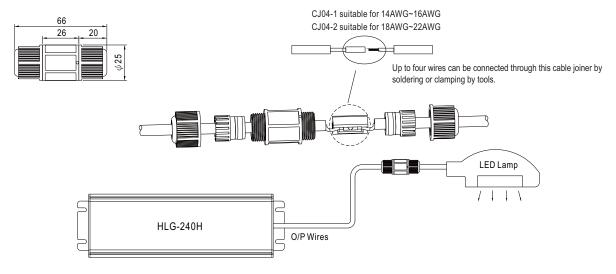

※CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No.: CJ04-1, CJ04-2.



